NORTHERN
ARCHITECTURAL SYSTEMS

# 7600A SERIES

## 3 ¼” FRAME DEPTH

## HI-RISE ACCESSIBILITY TERRACE DOOR

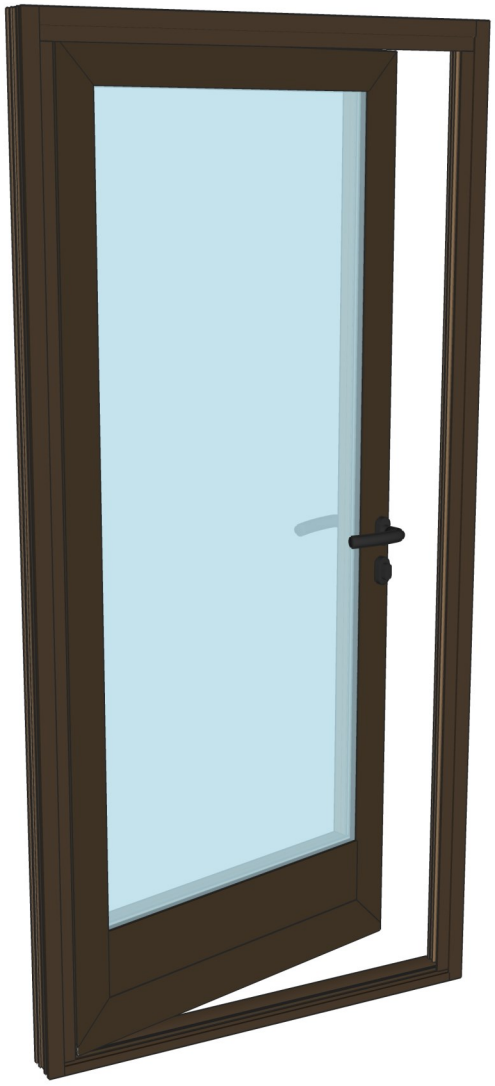

## PRODUCT OVERVIEW

Designed with ADA compatibility in mind, the 7600A Series Door incorporates an integrated 10” bottom rail, door closer and low profile sill while maintaining high performance. Its modern design suitable for both retrofit and new construction projects, and ADA-friendly efficiency make the 7600A Series a leader in its class.

## STANDARD FEATURES

- 1” Tempered insulated glass
- Multi-point locking hardware for added security
- Euro-groove design for hardware versatility
- Exterior operable handle
- Medium stile sash
- Low profile sill
- 10” Bottom rail
- Door closer and hold open device
- Polyamide strut thermal break
- Thumb turn interior lock

## OPTIONAL FEATURES

- Up to 1 ⅜” insulated glass
- Integrated transom
- Dual finish

## AVAILABLE ACCESSORIES

- Receptor system
- Trim

| TYPE | AAMA RATING | STRUCTURAL LOAD (psf) | TEST SIZE | WIND SPEED (mph) | AIR (cfm/ft$^2$) | WATER (psf) | U-VALUE [1] |
|---|---|---|---|---|---|---|---|
| Outswing | AW-80 | 120 | 48” x 96” | 50 (6.24psf) | <0.1 | 12 | 0.42 - 0.45 |

Performance data based on testing by AAMA Accredited Laboratory, NFRC Simulation software or independent testing. Actual results will vary based on field conditions, locations, size/configurations or glazing options. Be sure to verify the performance requirements for your particular project. [1] U-Values will vary depending on the glazing selected. Please contact Northern for further information.

Proud Member

111 Central Avenue, Teterboro, NJ 07608 ♦ (201) 943 6400 ♦ info@nas-usa.com ♦ www.NorthernArchitecturalSystems.com