NORTHERN
ARCHITECTURAL SYSTEMS

7000 SERIES

2 ½” - 3 ¼” FRAME DEPTH
TERRACE DOOR

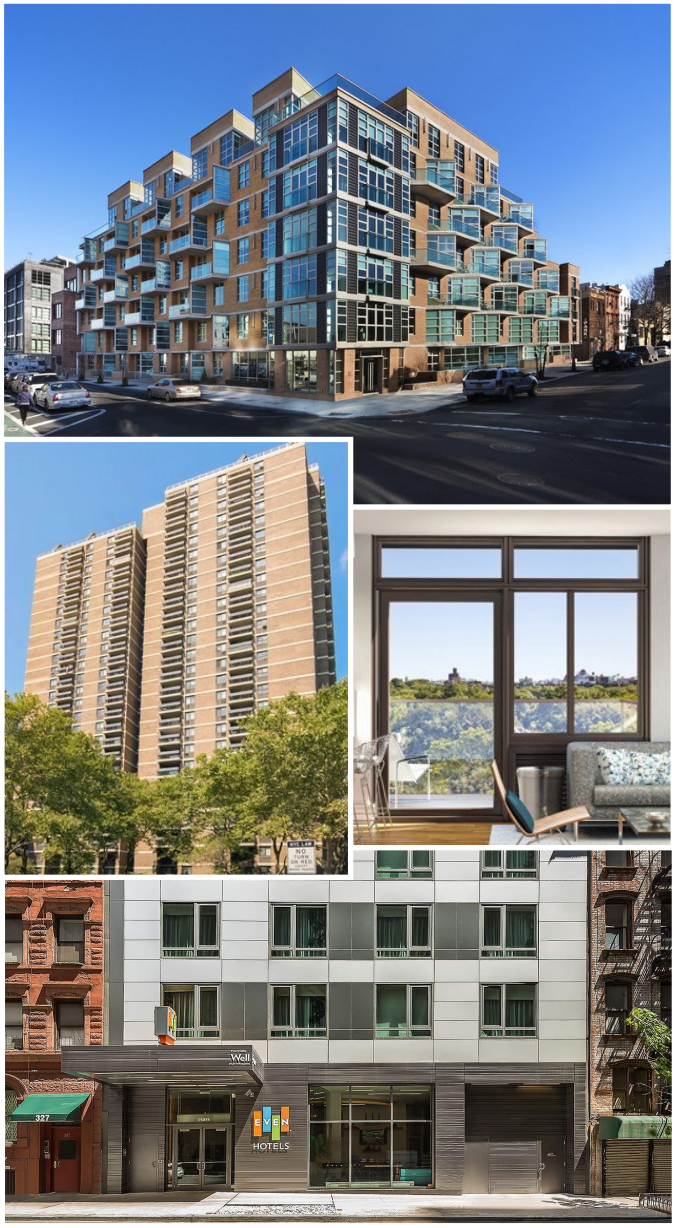

PRODUCT OVERVIEW

The 7000 Series Door is designed as a replacement terrace door for narrow openings as either inswing or outswing. It features interior-only handle operation with exterior pull, thumb turn locking and a triple gasket design for superior performance.

STANDARD FEATURES

- 1” Tempered insulated glass
- Multi-point locking hardware for added security
- Triple gasket design for superior performance
- Euro-groove design for hardware versatility
- Matching fixed window (7050)
- Exterior pull handle

OPTIONAL FEATURES

- Up to 1 ⅜” insulated glass
- Strutted design dual finish or 2-tone
- Dedicated impost for fixed and operable in a single master frame
- Low profile sill (with reduced water performance)
- Applied Flange (1”, 1 ½”, 2½”, 3 ¼”)

AVAILABLE ACCESSORIES

- Receptor system
- Trim

TYPE	AAMA RATING	STRUCTURAL LOAD (psf)	TEST SIZE	WIND SPEED (mph)	AIR (cfm/ft^2)	WATER (psf)	U-VALUE [1]
Outswing	AW-65 / 80 / 100	97.5 / 120 / 150	48” x 96”	50 (6.24psf)	<0.1	12	0.42 - 0.45
Inswing	AW-65 / 80 / 100	97.5 / 120 / 150	48” x 96”	50 (6.24psf)	<0.1	12	0.42 - 0.45
Fixed	AW-85 / 100	127.5 / 150	60” x 99”	50 (6.24psf)	<0.1	12	0.38

Performance data based on testing by AAMA Accredited Laboratory, NFRC Simulation software or independent testing. Actual results will vary based on field conditions, locations, size/configurations or glazing options. Be sure to verify the performance requirements for your particular project. [1] U-Values will vary depending on the glazing selected. Please contact Northern for further information.

Proud Member

111 Central Avenue, Teterboro, NJ 07608 ♦ (201) 943 6400 ♦ info@nas-usa.com ♦ www.NorthernArchitecturalSystems.com